



Redistributed under licence from HAE by Frank Key Tool Hire Ltd. Licence expires on 30/09/2020

CHECKLIST GENERATOR

- 1. All protective covers and fastenings are tight and in good condition.
2. Socket outlets are undamaged.
3. Fuses or circuit breakers are intact and undamaged.
4. Switches and controls are undamaged and operational.
5. The generator will not get wet in any way.
6. There is no risk from engine exhaust fumes.
7. There is no fire risk.
8. The generator is on a firm, level surface.
9. Facilities exist to allow safe refueling of the engine.
10. The public are kept away from the generator.

DISTRIBUTION CABLES

- 11. All distribution cables have heavy-duty protection against damage.
12. They are undamaged.
13. They are not in positions where they are likely to get damaged.
14. Plugs are undamaged and have not been tempered with.

DISTRIBUTION SOCKET CABLES

- 15. All protective covers and fastenings are tight and in good condition.
16. Socket outlets are undamaged.
17. Outlets are not in a position where they are likely to be damaged.
18. Outlets are sheltered from rain, and will not get wet in any other way.

CONNECTED EQUIPMENT

- 19. All connected equipment has correctly wired plugs: green-and-yellow connected to earth, blue connected to neutral and brown connected to live.
20. Plugs and cables of all connected equipment are in good condition.
21. The equipment is electrically safe.
22. The total current drawn does not exceed either individual distribution socket outlets, or the generator total capacity.

Please keep this leaflet safely as it may be required for future reference



Hire Association Europe 2450 Regents Court The Crescent Birmingham Business Park Solihull B37 7YE

Telephone: 44 (0) 121 380 4600 Fax: 44 (0) 121 333 4109 Email: mail@hae.org.uk website: www.hae.org.uk

Generators - Small 230v Systems

The rules and procedures in force where people are at work may require the person responsible for this equipment to carry out a specific risk assessment.

It is important to read this entire leaflet BEFORE using the generator

- 1. Plan your work and think ahead to make sure you will always be working safely. This leaflet is intended to give you guidance on the safe setting up and operation of a generator that is used to provide temporary power to a small number of items of equipment connected to the generator using a small number of extension cables and distribution boxes.
2. You should also read all of the safety instruction leaflet that came with the generator: this will give you information on how to start and refuel the generator safely.
3. Electricity can be hazardous and must always be used with great care. Because of this, a competent person must take responsibility for the safe use of the generator.
4. Do not forget that careless use of this generator could cause somebody to be injured, or even killed. Take great care when using it, and setting up or dismantling any system. Plan ahead to make sure that you will always have a safe operation.
5. You will need a qualified competent qualified electrician if you plan to make any electrical connections other than with plugs and sockets.
6. If you plan to use the generator to power a circuit or installation that is normally powered by the mains, this must be done by a qualified competent electrician.
7. Never connect a generator to a circuit that is still connected to the public main supply.
8. Do not use the generator in any way that it was not designed for - it will provide an electricity supply at the stated voltage and current only.
9. If you need more power, contact the hire company.



Every effort has been made by HAE/EHA to ensure that the information given in this document and supporting material is accurate and not misleading. HAE/EHA cannot accept responsibility for any loss or liability perceived to have arisen from the use of any such document/material. Only Acts of Parliament and Statutory Instruments have the force of law and only the courts can authoritatively interpret the law.

Any unauthorised reproduction - manually or electronically - is STRICTLY prohibited


Telephone: 44 (0) 121 380 4600 Fax: 44 (0) 121 333 4109 Email: mail@hae.org.uk website: www.hae.org.uk

Hire Association Europe 2450 Regents Court The Crescent Birmingham Business Park Solihull B37 7YE

Inspect the generator and all electrical equipment thoroughly, checking each of the points on the list below. You should do this before you start to use it, and at the start of every day until it is dismantled.

CHECKLIST REGULAR INSPECTION


- 1. Only use proper plugs and sockets to make connections to the generator and extension cables. If anything needs wiring in directly, get a competent electrician to do it. Check the wiring connections in the extension cables that has not been supplied by the hire company. Incorrect plug wiring could be very hazardous. Do not assume that because the equipment works, and does not give you a shock when plugged in to a domestic system, that it does not need earth/yellow-green and blue/neutral. Re-member the correct use of green-and-yellow/earth- live and brown/neutral. Insulation undamaged cable sheath; conductor connected to earth; blue to neutral and brown to live.
2. The generator's power rating will be shown on its case. The table below shows how a kVA figure relates generally to watts.
3. Do not assume that because the equipment works, and does not give you a shock when plugged in to a domestic system, that it does not need earth/yellow-green and blue/neutral. Re-member the correct use of green-and-yellow/earth- live and brown/neutral. Insulation undamaged cable sheath; conductor connected to earth; blue to neutral and brown to live.
4. Check the wiring connections in the extension cables that has not been supplied by the hire company. Incorrect plug wiring could be very hazardous. Do not assume that because the equipment works, and does not give you a shock when plugged in to a domestic system, that it does not need earth/yellow-green and blue/neutral. Re-member the correct use of green-and-yellow/earth- live and brown/neutral. Insulation undamaged cable sheath; conductor connected to earth; blue to neutral and brown to live.
5. If you have to leave the generator running, make sure that a competent person - who knows how to stop it - keeps a check on the system until your return. If the generator or any other hired equipment does not work properly, do not try to repair it. Contact the hire company.
6. Make sure that nobody interferes with the generator or any connected equipment, or does anything that is likely to damage it, or get it wet. Do not let anyone plug any equipment in until you have checked that the plug is wired correctly, and that it will not overload the system. If you have to leave the generator running, make sure that a competent person - who knows how to stop it - keeps a check on the system until your return. If the generator or any other hired equipment does not work properly, do not try to repair it. Contact the hire company.

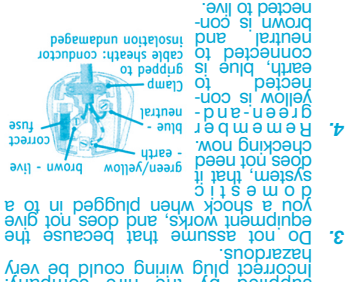

18. The generator's power rating will be shown on its case. The table below shows how a kVA figure relates generally to watts.

Table with 2 columns: Generator (kVA), Watts (W). Rows: 0.5, 1, 1.5, 2, 2.5, 4, 5.

Table with 2 columns: Generator (kVA), Amps (A), Power (W), Kilowatts (kW). Rows: 1/2, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13.

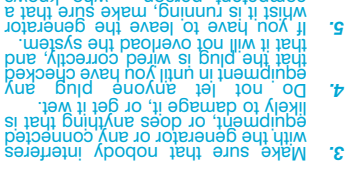

- 1. The safety instruction leaflet that was supplied with the generator gives you important information on how to use the generator safely. Keep a close check on the generator, cables, and all equipment at all times. If you can see any damage to any item, stop the generator before looking closely.
2. The generator's power rating will be shown on its case. The table below shows how a kVA figure relates generally to watts.

USING THE GENERATOR

- 1. The safety instruction leaflet that was supplied with the generator gives you important information on how to use the generator safely. Keep a close check on the generator, cables, and all equipment at all times. If you can see any damage to any item, stop the generator before looking closely.
2. The generator's power rating will be shown on its case. The table below shows how a kVA figure relates generally to watts.
3. Do not assume that because the equipment works, and does not give you a shock when plugged in to a domestic system, that it does not need earth/yellow-green and blue/neutral. Re-member the correct use of green-and-yellow/earth- live and brown/neutral. Insulation undamaged cable sheath; conductor connected to earth; blue to neutral and brown to live.
4. Check the wiring connections in the extension cables that has not been supplied by the hire company. Incorrect plug wiring could be very hazardous. Do not assume that because the equipment works, and does not give you a shock when plugged in to a domestic system, that it does not need earth/yellow-green and blue/neutral. Re-member the correct use of green-and-yellow/earth- live and brown/neutral. Insulation undamaged cable sheath; conductor connected to earth; blue to neutral and brown to live.
5. If you have to leave the generator running, make sure that a competent person - who knows how to stop it - keeps a check on the system until your return. If the generator or any other hired equipment does not work properly, do not try to repair it. Contact the hire company.
6. Make sure that nobody interferes with the generator or any connected equipment, or does anything that is likely to damage it, or get it wet. Do not let anyone plug any equipment in until you have checked that the plug is wired correctly, and that it will not overload the system. If you have to leave the generator running, make sure that a competent person - who knows how to stop it - keeps a check on the system until your return. If the generator or any other hired equipment does not work properly, do not try to repair it. Contact the hire company.



- 1. The safety instruction leaflet that was supplied with the generator gives you important information on how to use the generator safely. Keep a close check on the generator, cables, and all equipment at all times. If you can see any damage to any item, stop the generator before looking closely.
2. The generator's power rating will be shown on its case. The table below shows how a kVA figure relates generally to watts.

BEFORE STARTING WORK...

- 1. Inspect the generator and all cable reels should be fully unrolled so that they do not overheat.
2. Do not connect several extension cables together to reach a wider area. If you need power in a remote place, hire another generator.
3. Do not try to link two generators together to share a load. This is hazardous and will damage the generators.
4. The generator may not be suitable for use with some power tools that have electronic speed control, and sensitive electronic equipment such as video recorders, computers, or some public address systems. Check with the hire company before use.
5. Hand-held tools and equipment should be double insulated, marked with a symbol. Do not use earthed tools - those that have an earth wire. Do not overload distribution boxes or the generator by trying to draw too much power.
6. Make sure that cables are laid out carefully so that they will not be damaged by vehicles, people walking on them or anything else. Check that the cables do not cause a tripping hazard, especially by being over a ditch or in a position where they are likely to be damaged.
7. Do not use lightweight cables that would be easily damaged.
8. Make sure that cables are laid out carefully so that they will not be damaged by vehicles, people walking on them or anything else. Check that the cables do not cause a tripping hazard, especially by being over a ditch or in a position where they are likely to be damaged.
9. Check the labels on the equipment (eg 2 kW). Use the table below to convert from one to another.
10. Cable reels should be fully unrolled so that they do not overheat.
11. Do not connect several extension cables together to reach a wider area. If you need power in a remote place, hire another generator.
12. Do not try to link two generators together to share a load. This is hazardous and will damage the generators.
13. Do not allow any equipment to be plugged in to the generator or extension cables unless it has been checked for safety. The section headed Electrical connections and the checklist towards the end of this leaflet can help you to do this.
14. The generator may not be suitable for use with some power tools that have electronic speed control, and sensitive electronic equipment such as video recorders, computers, or some public address systems. Check with the hire company before use.
15. Hand-held tools and equipment should be double insulated, marked with a symbol. Do not use earthed tools - those that have an earth wire. Do not overload distribution boxes or the generator by trying to draw too much power.
16. Do not overload distribution boxes or the generator by trying to draw too much power.
17. Check the labels on the equipment (eg 2 kW). Use the table below to convert from one to another.

